


Correct Tile Placement for ECB® strip applications

Full Floor Coverage with 36" ECB® is the best way to ensure maximum fracture-free protection for tile, but what about isolating hairline fractures in substrates?

Strip applications of ECB® will protect tile from isolated cracks, however, correct positioning of the tile is critical. Only one side of each tile should be affixed to the subfloor. This will allow the subfloor to move in-plane while ECB® absorbs the stress of that movement. Tile should never be affixed directly to the subfloor on both sides of the membrane.

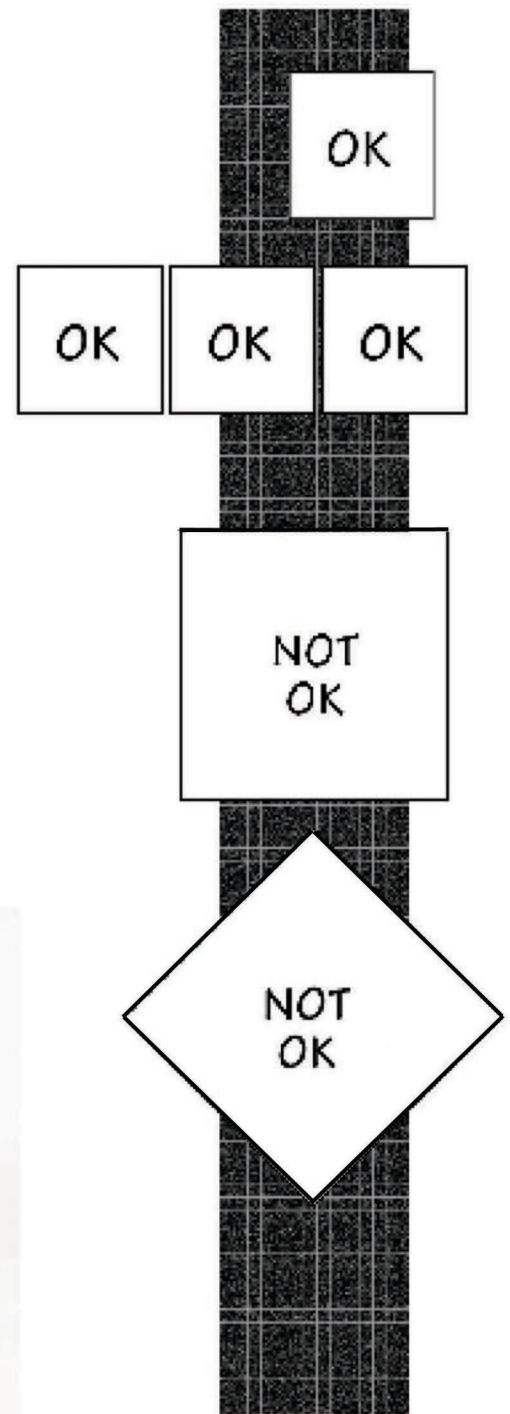

12" or 24" Strip of ECB®



Contact NAC Products with questions or for more information, 800-633-4622 or visit us on the web at www.NACproducts.com