

Yorktown Flex-E-Clic

Premium Vinyl Wood Plank



PRODUCT QUICK SPEC

1. MANUFACTURER

Surface Source USA Inc.
825 Great Southwest Parkway SW
Atlanta, Ga. 30336
P (888)862-9898 F (678)626-0520
www.surface-source.us

2. PRODUCT DESCRIPTION

Yorktown Flex-E-Clic designed for use in commercial and residential applications. The Yorktown Flex-E-Clic collection features a natural wood look. Its rugged construction, including a 12 mil wear layer topped with Maxim Shield UV cured ceramic finish permits maximum durability ensuring long lasting beauty without the use of a floor finish. The composition ensures a 100% Pro-polymer Virgin PVC with fiberglass reinforced sheets. With excellent resistance to abrasion, chipping, cracking, and permanent indentations for heavy-duty performance requirements and to help conceal most substrate irregularities. Yorktown Perfect Fit is the perfect choice for basements, homes, office, banks, healthcare and condominiums, or wherever both function and high design are essential.

The surface includes an micro bevel embossed surface to enhance the unique texture of wood, while adding slip resistance qualities to the plank. Precision cutting allows for easy Clic installation with tight seams.

FloorScore®

Indoor Air Quality Certified to SCS-EC 10.2-2007
Conforms to California Specification 01350 (Standard Method v1.1, effective January 1, 2012)
for the school classroom and private office parameters¹.

¹Modeled Product Type: Flooring

Registration # SCS-FS-03197

Valid from: November 1, 2013 to May 31, 2014

Available Styles (All Dimensions Nominal)

Gauge: 3/16" (4.2 mm)

Size: 7.09" x 48" Packaging: 12 pieces per
Carton (28.36 sq. /ft. per Carton)

3. TECHNICAL DATA

Product Classification

ASTM F 1700 - Solid Vinyl Tile; Class III, Type

B Fire Testing Information

ASTM E 648, Critical Radiant Flux - Class 1, > .45
W/cm²

General Performance Information

ASTM C 1028, Slip Resistance - > 0.60

ASTM F 970, Static Load - 2,000 PSI, < .005"

ASTM F 925, Resistance to Chemicals - No
Change

ASTM F 1514, Heat Stability of Color - $\Delta E < 8$ Avg

ASTM F 1515, Light Stability of Color - $\Delta E < 8$ Avg

ASTM F 1914, Residual Indentation - 3.4% ASTM

F 2199, Dimensional Stability - < .020" / In ft

4. TECHNICAL ASSISTANCE

Technical service information and assistance may be obtained
1-888-662-9898 or www.surface-source.us


5. LIMITED WARRANTY

Limited One (1) Year Manufacturer's Warranty

Limited Twelve (12) Year Commercial Wear

Warranty Limited Twenty five (25) Year Residential

Wear Warranty

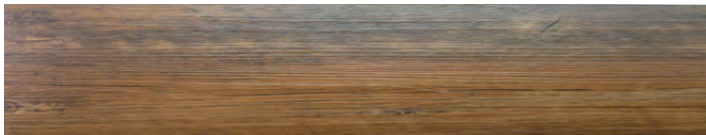


Historic Pine LVP44113C



Toffee Oak LVP44123C




Driftwood Pine LVP44111C

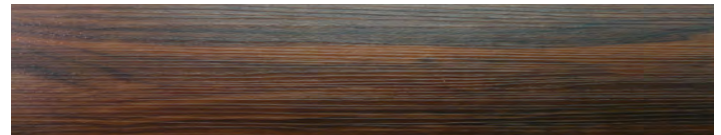

Merlot Walnut LVP44116C



Maple LVP44102C

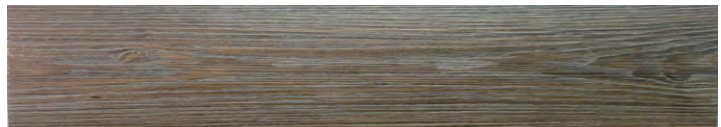

Rustic Oak LVP41114C