



POWERHOLD

MULTI PURPOSE FLOORING ADHESIVE

Multi Pegamento del Suelo del Proposito

0003

DESCRIPTION:

POWERHOLD 3000 MULTI PURPOSE FLOORING ADHESIVE is recommended for the installation of the majority of carpet backings used in today's indoor residential and commercial applications.

POWERHOLD 3000 is a competitively priced, proven performer, whether installing carpet with Action-Bac®, Latex Unitary, Enhancer type backings or felt or mineral backed sheet goods. **POWERHOLD 3000** is highly recommended for use in health care facilities, educational institutions, hospitals, dining areas and occupied buildings.

POWERHOLD 3000 is NOT recommended for any PVC backed floor-covering.

SUBFLOOR PREPARATION

POWERHOLD 3000 can be used to install over plywood, hardwood and all grades of concrete in the absence of excessive moisture or alkalinity. The "tacky" installation method is preferred when installing over non-porous surfaces such as terrazzo, wax-free floor tile, and non-cushioned sheet goods. Allow the adhesive to tack up when installing cushion backed carpet. Contact the floor-covering manufacturer for their recommendations regarding approved substrates and suggested procedures for trowel selection, conditioning, seaming and rolling. Substrate testing and surface preparation should conform to CRI 104/105 Standards, or ASTM F-710.

WARNING: Follow the RFCI's written instructions for removal of any products that contain Asbestos prior to the use of **POWERHOLD** adhesives. For more information contact RFCI at 401 East Jefferson St. Suite 102, Rockville, MD 20850. Ph: (301) 340-8580.


APPLICATION:

Apply adhesive with a notched trowel per recommendations of the flooring and adhesive manufacturer. Spread adhesive with the appropriate notched trowel-leaving ridges of sufficient height to establish complete contact with back of floor covering. Trowel sizes vary with sub-floor porosity,

floor covering backing and open time requirements.


TROWEL RECOMMENDATIONS:

Rough back flooring: 1/8" x 1/8" x 1/8" U-notch



Coverage = 60-100 sq. ft.

Smooth back flooring: 1/8" x 1/8" x 1/8" Square notch

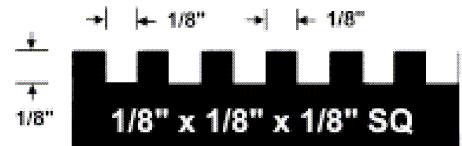

Coverage = 80-120 sq. ft.

CLEAN UP

Fresh adhesive can be removed immediately with a damp cloth. If the adhesive has dried, use waterless hand cleaner or Mineral Spirits. Do not allow solvent to penetrate the seams. Solvent will dissolve the adhesive bond.

WARNING

Follow RFCI's written instructions for removal of any products that may contain asbestos prior to the use of **POWERHOLD** Adhesives. For more information contact RFCI at 401 East Jefferson St., Suite 102, Rockville, MD 20850

LIMITED 2-YEAR PRO-RATED WARRANTY

This limited warranty is your assurance that **POWERHOLD 3000 Multi Purpose Adhesive** meets our high standard of quality and excellence. **POWERHOLD** is warranted against cohesive failure (loss of bond) and formulated so as not to discolor or cause adhesive-induced staining in today's floor coverings. This limited warranty covers flooring sold and graded as regulars, not seconds or trials.



POWERHOLD

3000

POWERHOLD 3000 is guaranteed for the life of the floor covering, up to 2 years, provided all manufacturers' recommendations and industry standards such as those guidelines set forth in CRI 104, 105, ASTM f-710 and RFCI guidelines are followed as they pertain to the type of floor covering being installed.

1. Flooring must be professionally installed
2. This limited warranty covers materials* on a pro-rated basis for the life of the installation, up to 2 years, and reasonable labor costs.

THIS LIMITED WARRANTY DOES NOT COVER

- Dissatisfaction due to improper maintenance, installation or subfloor irregularities.
- Topical staining such as those caused by asphalt driveway sealers.
- Failures due to excessive moisture in substrates, or flooding.
- Mildew caused by patching compounds.
- Installation or use of this adhesive over existing cutback adhesive or its residue.
- Installation of residential flooring in a commercial application.
- Installation over sealers or curing agents.

Warranty claims by the sealer manufacturer that their product is compatible with most flooring adhesives falls under the sealer and curing agent manufacturer's warranty.

CONSEQUENTIAL OR INCIDENTAL DAMAGES:

The adhesive manufacturer excludes and will not pay consequential or incidental damages under this limited warranty. By this we mean any loss, expense or damage other than to flooring itself that may result from a defect in the adhesive itself.

NO OTHER WARRANTIES

The above warranties are the only warranties offered regarding this product. The adhesive manufacturer specifically disclaims any other warranties, including the warranties of merchantability and fitness for a specific purpose, are specifically

disclaimed and there are no other warranties, expressed or implied.

In the event of a warranty claim, the adhesive manufacturer reserves the right to inspect and/or conduct test(s) on any claim prior to authorizing repair or replacement work.

**Materials meaning same type and grade, if available. If unavailable or discontinued, the adhesive manufacturer reserves the right to pay dollar amount of initial amount on a pro-rated basis.*

SHELF LIFE

One year @ 70°F in un-opened container.

CALIFORNIA VOC COMPLIANCE: Solvent Free Product

SCAQMD Rule 1168: VOC compliant.
SCAQMD Rule 443.1: Grams of VOC per Liter of Material < 1 gram/liter.
Grams of VOC per Liter of Coating < 1 gram/liter.

Updated: 10-03-08