



MANUFACTURER

OMI VINYL (ANHUI) Co., Ltd.
Address: Economic Development Langxi Anhui, CHINA
Tel: +86-563-7375880 Fax: +86-563-7373880
Web: www.omivinyl.com

PRODUCT DESCRIPTION

Eureka ESPC is designed for use in commercial and residential applications. The Eureka ESPC collection features a natural wood look. Its rugged construction, including a 6 mil wear layer topped with UV cured ceramic finish permits maximum durability ensuring long lasting beauty without the use of a floor finish. The composition ensures a 100% Virgin PVC and Phthalates Free with SPC Core. With excellent resistance to abrasion, chipping, cracking, and permanent indentations for heavy-duty performance requirements and to help conceal most substrate irregularities. Eureka ESPC is the perfect choice for basements, homes, office buildings, banks, healthcare and condominiums, or wherever both function and high design are essential. The surface includes a micro bevel embossed surface to enhance the unique texture of wood, while adding slip resistance qualities to the plank. Precision cutting allows for easy 1G Click installation with tight seams.

AVAILABLE STYLES (ALL DIMENSIONS NOMINAL)

Thickness: Overall 4.5mm, 3.5mm + 1mm XPE Foam
Size: 7.09" x 48"
Packaging: 12 pieces per carton (28.36 sq. /ft. per Carton)
Pallet: 60 cartons, 16 pallets on container

TECHNICAL DATA


Product Classification
ASTM F 1700 - Solid Vinyl Tile; Class III, Type B
Fire Testing Information
ASTM E 648, Critical Radiant Flux - meet or exceeds Class 1
General Performance Information
ASTM C1028-96, Static Coefficient of Friction .060 slip resistance Passes ADA/OSHA standard -
ASTM F970, Static Load - .004 inch Passes 250
ASTM F925, Resistance to Chemicals - No Change
ASTM F1514, Heat Stability of Color - ΔE < 8 Avg
ASTM F1515, Light Stability of Color - ΔE < 8 Avg
ASTM F1914, Residual Indentation - 3.4%
ASTM F2199, Dimensional Stability -.20" / in ft
ASTM E648 Critical Radiant Flux Class 1
ASTM E492-09 Impact Sound Conduction IIC 64db
ASTM E90-09 Airborne Sound Conduction STC 64db
ASTM F2753 Rolling load over Resilient .024 inch
PSI: 5000lb

TECHNICAL ASSISTANCE


Please contact your local rep or call 336-781-3816

WARRANTY


Lifetime Manufacturer's Warranty
Lifetime Waterproof Warranty
Limited Seven (7) Year Commercial Wear Warranty
Lifetime Residential Wear Warranty

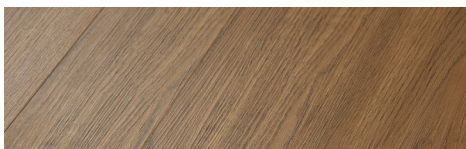


BUCKSKIN OAK ESPC44621C

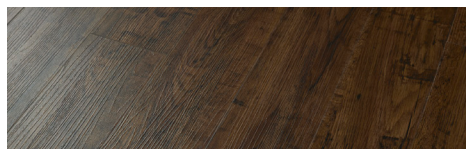


CHOCOLATE OAK ESPC44608C

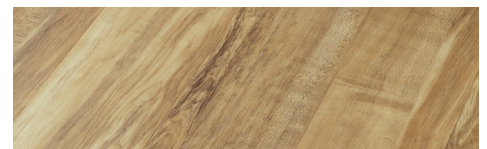


RUSTIC MAPLE ESPC44617C

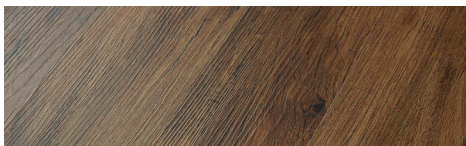


CINNAMON OAK ESPC44624C

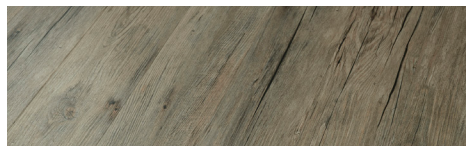

DRIFTWOOD PINE ESPC44611C

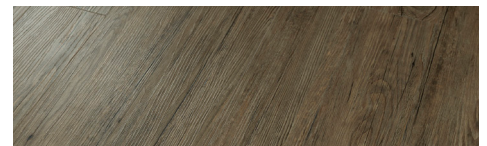

WEATHERED PINE ESPC44619C

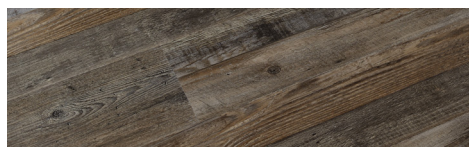

FADED OAK ESPC44648C



GREY OAK ESPC44622C