

# ARDEX K 40 RAPID™

Rapid, High Flow Self-Leveling Underlayment




CHOOSE  
RAPID DRYING

Use to level and smooth interior concrete, terrazzo, ceramic and quarry tile, epoxy coating systems and non-water-soluble adhesive residue on concrete

Rapid dry technology – Install most flooring in as little as 2 hours

Levels from 1/8" (3 mm) up to 1" (24 mm) thick

Interior use only

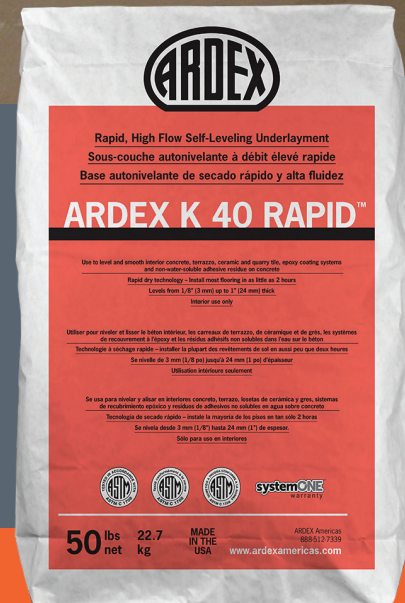

ARDEX Americas  
400 Ardex Park Drive  
Aliquippa, PA 15001  
888-512-7339

[www.ardexamericas.com](http://www.ardexamericas.com)

systemONE™  
warranty